



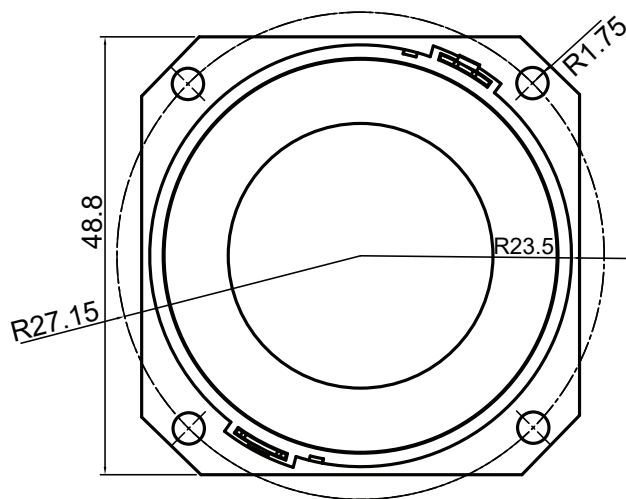

NRT50-8 2" EXTENDED RANGE DRIVER 8 OHM


MECHANICAL DRAWING

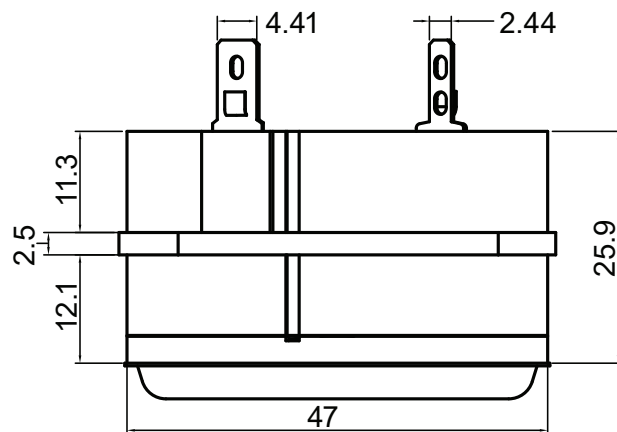

FEATURES

- Full-range, 2" underhung driver with 2.5 mm of Xmax
- Neodymium Radial motor design for extremely low distortion
- Extreme ventilation for great power handling
- Small frame size for reduced center-to-center distance and reduced comb filtering when used in arrays
- Great replacement speaker

IMPEDANCE/PHASE

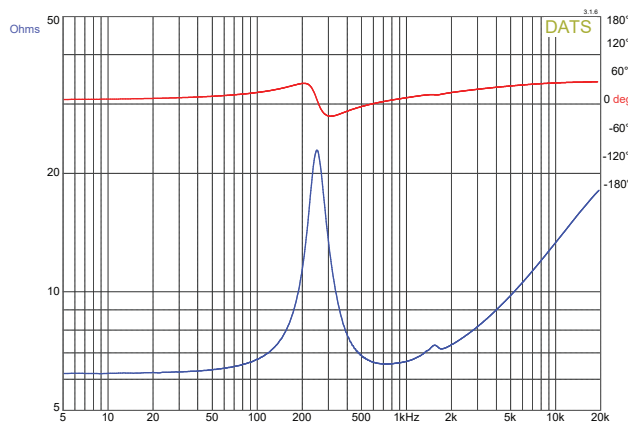

PARAMETERS

Impedance	8 ohms
Re	6.2 ohms
Le	0.12 mH@10k
Fs	250 Hz
Qms	4.43
Qes	1.65
Qts	1.21
Mms	1.11g
Cms	0.36 mm/N
Sd	8.9 cm ²
Vd	22.3 cm ³
BL	2.57 Tm
Vas	0.06 liters
Xmax	2.5 mm
VC Diameter	38 mm
SPL	79.9 dB @ 2.83V/1m
RMS Power Handling (AES 426B)	15 watts
Usable Frequency Range (Hz)	180 - 15,000 Hz

FREQUENCY RESPONSE

